


DOWNLIGHT
SMD SERIES
IP 65

LD704 Series
15W/20W/30W/40W

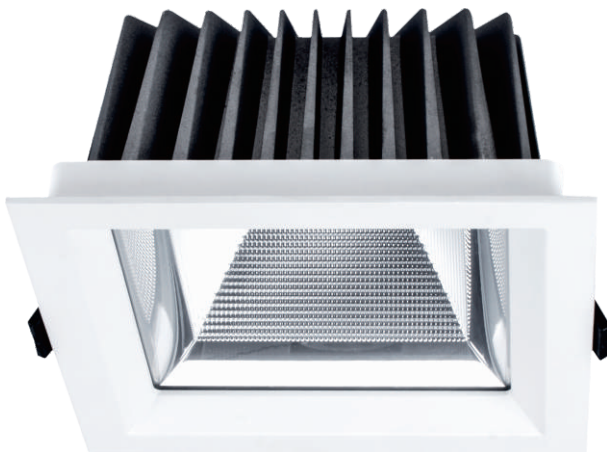

Product Parameters

Power:	15W	20W	30W	40W
Item No:	LD7043	LD7044	LD7046	LD7048
Cut out:	95x95mm	110x110mm	145x145mm	200x200mm
Size(DxH):	110x110x60mm	128x128x70mm	165x165x80mm	220x220x90mm

Construction

Aluminium Die-Cast heatsink and Frame.
M. S. CRCA Back body
Passive cooling design for heat dissipation.

LED

Bridgelux
Citizen
Lumiled
Cree

Reflector

High reflection Aluminium / PC reflector
Color - silver / Golden
Beam angle - 60°

Driver

BAG
Osram
Philips
Argo

Finish

○ ● ●
WH BL GR



Technical Specifications

Product Name	: Marker
Housing	: Alu. Die Cast
Heatsink	: Alu. Die Cast
Beam Angle	: 60°
Surface Finish	: White / Black / Grey
Tilt / Rotation	: Fixed
Mounting	: Recess mount

LED	: COB
LED efficacy	: 90 lm / watt
LED CRI	: >80 >90 >95
LED CCT	: 2700K - 6500K
LED Bin	: 2/3 step
LED life	: 50,000 hrs

Input Voltage	: 100-240 V AC
Frequency	: 50~60 Hz
Operating temp	: -20° C ~ +40° C
Driver Surge	: 2.5 / 6.0KV
Power Factor	: 0.95 / 0.5
Ingress Protection	: IP65

System Watt	: 15W/20W/30W/40W
-------------	-------------------

