


DOWNLIGHT
COB SERIES
IP 20

LD708*M Series
15W/24W/32W/48W

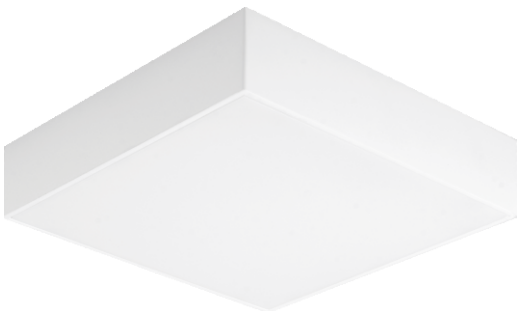

Product Parameters

Power:	15W	24W	32W	48W
Item No:	LD7084M	LD7086M	LD70810M	LD70812M
Size(DxH):	120x120x40mm	175x175x40mm	225x225x40mm	300x300x40mm

Construction

Aluminium Die-Cast heatsink and Frame.
M. S. CRCA Back body
Passive cooling design for heat dissipation.

LED

Bridgelux
Citizen
Lumiled
Cree

Reflector

High reflection Aluminium / PC reflector
Color - silver / Golden
Beam angle - 120°

Driver

BAG
Osram
Philips
Argo

Finish

○ ● ●
WH BL GR



Technical Specifications

Product Name	: Marker
Housing	: Alu. Die Cast
Heatsink	: Alu. Die Cast
Beam Angle	: 120°
Surface Finish	: White / Black / Grey
Tilt / Rotation	: Fixed
Mounting	: Surface mount

LED	: SMD
LED efficacy	: 90 lm / watt
LED CRI	: >80 >90 >95
LED CCT	: 2700K - 6500K
LED Bin	: 2/3 step
LED life	: 50,000 hrs

Input Voltage	: 100-240 V AC
Frequency	: 50~60 Hz
Operating temp	: -20°C ~ +40°C
Driver Surge	: 2.5 / 6.0KV
Power Factor	: 0.95 / 0.5
Ingress Protection	: IP20

System Watt	: 15W/24W/32W/48W
-------------	-------------------



IP 20

