


LO 702 Series

30W/40W/54W/64W

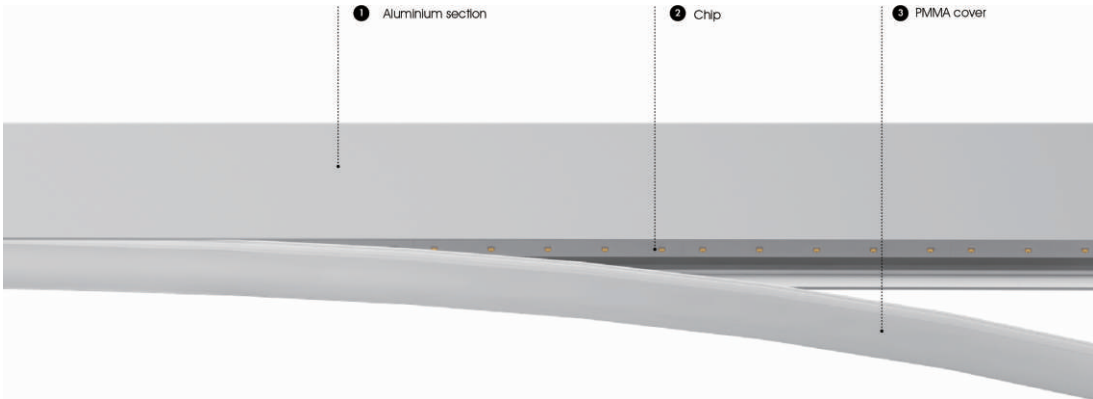

Technical Specifications

Product Name	: Marker
Housing	: Alu. Die Cast
Heatsink	: Alu. Die Cast
Beam Angle	: 120°
Surface Finish	: White / Black / Grey
Tilt / Rotation	: Fixed
Mounting	: Suspension mount

LED	: SMD
LED efficacy	: 80 lm / watt
LED CRI	: >80 >90 >95
LED CCT	: 2700K - 6500K
LED Bin	: 2/3 step
LED life	: 50,000 hrs

Input Voltage	: 100-240 V AC
Frequency	: 50~60 Hz
Operating temp	: -20°C ~ +40°C
Driver Surge	: 2.5 / 6.0KV
Power Factor	: 0.95 / 0.5
Ingress Protection	: IP20

System Watt	: 30W/40W/54W/60W
-------------	-------------------



Product Parameters

Power:	24W	30W	40W	52W
Item No:	LO7021	LO7022	LO 7023	LO 7024
Size(mm):	1000x50x35	1000x70x50	1000x100x50	1000x120x50

Construction

Aluminium Die-Cast heatsink and Frame.
M. S. CRCA Back body
Passive cooling design for heat dissipation.

LED

Bridgelux
Citizen
Lumiled
Cree

Reflector

High reflection Aluminium / PC reflector
Color - silver / Golden
Beam angle - 120°

Driver

BAG
Osram
Philips
Argo

Finish

○ ● ●
WH BL GR

